

Vacuum Drying Oven VSD-e

Compact and flexible for laboratory applications



With its double-walled, jointless interior, the VSD-e can be cleaned easily and is therefore ideal for GMP processes.

PiNK's VSD-e is a compact, high-grade vacuum drying oven designed to provide users in industry, science, and research with a productive, safe, and clean lab system.

The advantages of the VSD with its GMP/FDA design are now available for smaller laboratory applications, too.

The VSD-e has an electric contact heater with integrated control. All it needs to start work is a socket and vacuum device.

The door is equipped standardly with a tightly welded insulating jacket.

Technical data

Shelf area: 0.18 m²

Temperature: max. 200 °C

Heating: electric

Power: 230 V, 3 kW

Materials: high-grade stainless steels, Hastelloy, Inconel, Titanium

Surfaces: ground and polished, electropolished on request


Weight: 150 kg

System features



- GMP-/FDA-compliant design
- Extra-compact design
- For mobile and flexible use
- No concealed surfaces
- Rounded corners and edges (20 mm radius)
- Simple cleaning
- No penetrations for heating
- Outstanding surface quality (ground and polished)
- Double-jointed door hinge



Dimensions of the vacuum drying oven VSD-e

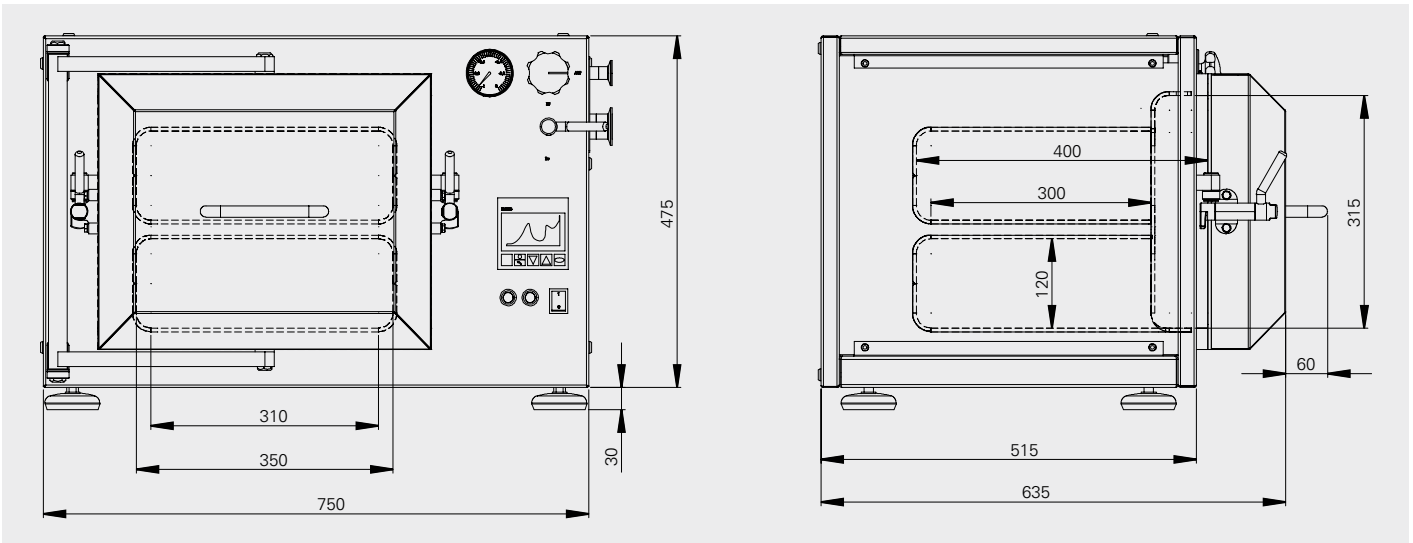

Features VSD-e

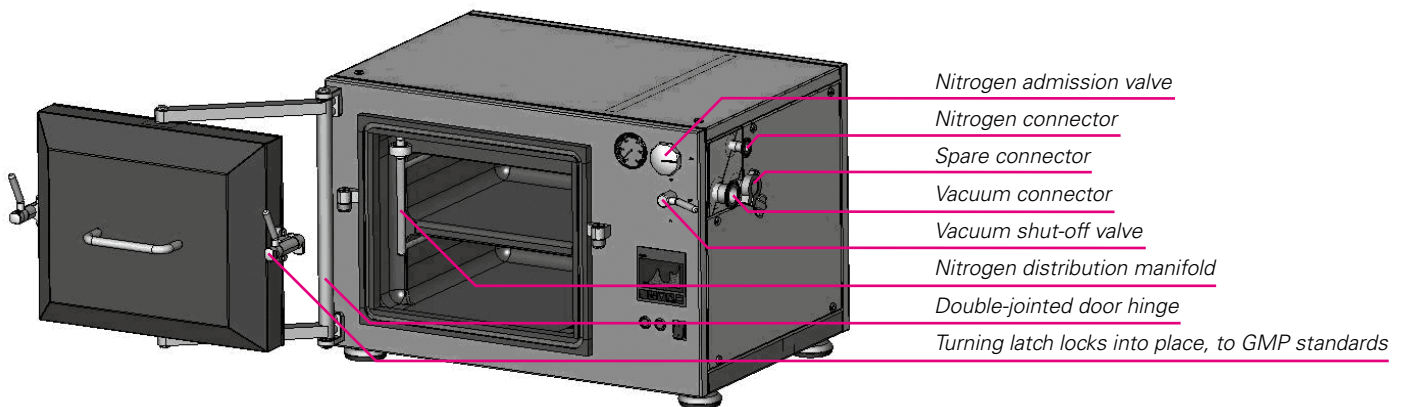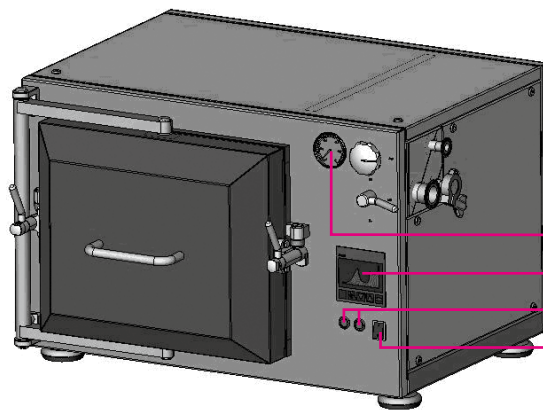

PiNK GmbH **Thermosysteme**

Am Kessler 6
97877 Wertheim
Germany
T +49 (0) 9342 919-0
F +49 (0) 9342 919-111
thermosysteme@pink.de
www.pink.de